

Night Shift Lighting




Night
Shift
Lighting


Website: www.nightshiftlighting.com




M00-M03

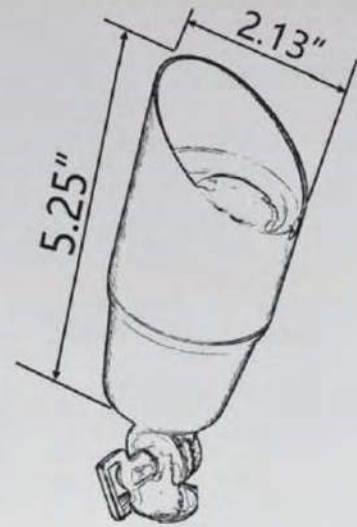

RNW-029

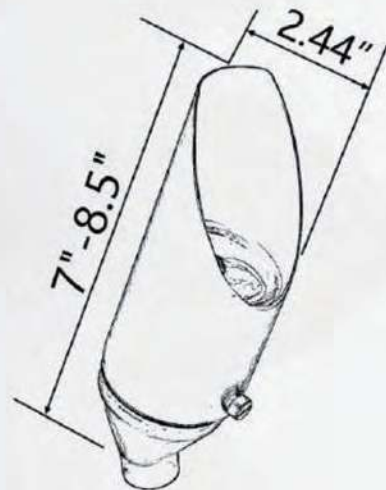

WJW-087

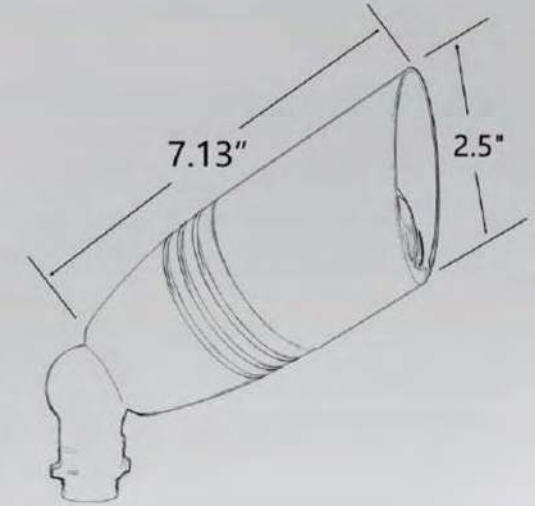

MATERIAL / FEATURES

- Cast Brass
- Heat Resistant Convex Glass Lens
- Includes ABS Ground stake, 1/2" NPT thread, slotted for ease of installation
- EPDM Rubber Bug plug, Prevents moisture /bugs from entering fixture
- Thumb screw on kuckle for easy field adjustment
- Double "O" ring seal for added moisture protection

SPECIFICATION


Finish : Bronze
 Lamp : MR16 (Lamp not included)
 Wire Lead: 3' -#18/2 direct bury landscape lighting wire
 Stake : ABS Ground stake
 Lens : Heat Resistant Glass Lens

APPLICATIONS


- Grazing
- Up Lighting
- Down Lighting
- Moon Lighting
- Back Lighting




MJW-087

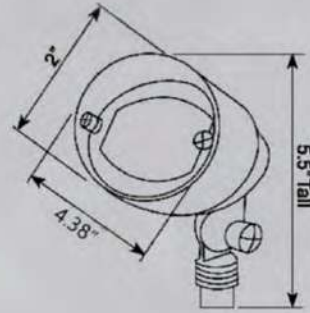

FOD-721

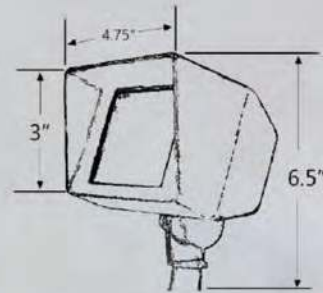

WELL-FLT

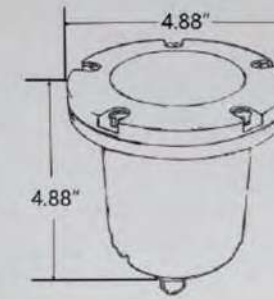


WELL-MN



WELL-GRT



WELL-LIP

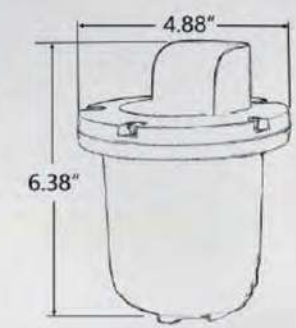

METERIAL / FEATURES

- Cast Brass
- Heat Resistant glass lens (includes-Clear,frosted lens w/ quick change gasket)
- One piece anodized aluminum reflector for maximum light output
- Includes (GS1) ABS Ground stake, 1/2" NPT thread, slotted for ease of installation
- EPDM Rubber Bug plug, Prevents moisture /bugs from entering fixture
- Thumb screw on kuckle for easy field adjustment

SPECIFICATION

Finish : Bronze
 Lamp : G4 (Lamp not included)
 Light Output: One piece anodized aluminum reflector for max light output
 Wire Lead: 3' -#18/2 direct bury landscape lighting wire
 Stake : ABS Ground stake
 Lens : Heat Resistant Glass Lens (clear, frosted)

APPLICATIONS

- Wall Wash
- Backlighting
- Small low lying shrubs
- Putting Greens
- Down Lighting
- Sign and monument lighting

METERIAL / FEATURES

- Cast Brass
- Heat Resistant glass lens (includes-Clear lens w/quick change gasket)
- One piece anodized aluminum reflector for maximum light output
- Includes (GS1) ABS Ground stake, 1/2" NPT thread, slotted for ease of installation
- EPDM Rubber Bug plug, Prevents moisture /bugs from entering fixture
- Thumb screw on kuckle for easy field adjustment

SPECIFICATION

Finish : Bronze
 Lamp : G4 (Lamp not included)
 Light Output: One piece anodized aluminum reflector for max light output
 Wire Lead: 3' -#18/2 direct bury landscape lighting wire
 Stake : ABS Ground stake
 Lens : Heat Resistant Glass Lens (clear)

APPLICATIONS

- Wall Wash
- Backlighting
- Large low lying shrubs
- Putting Greens
- Down Lighting
- Sign and monument lighting



KP-W-003

KP-W15
KP-W18

KP-W15-006

MATERIAL / FEATURES




- Die-Cast Brass
- All shades ship with Heat-resistant light PC
- Multiple "O" Ring seal for added moisture protection
- All shades require posts which are sold separately

SPECIFICATION

Finish : Bronze
 Lamp : G4 (Lamp not included)
 Light Output: Internal ceramic for Max light output
 Wire Lead: 3' -#18/2 direct bury landscape lighting wire
 Post : Cast Brass, 12" / 15" /18" Height

APPLICATIONS

- Sideway
- Area Lighting
- Area Lighting
- Step Lighting

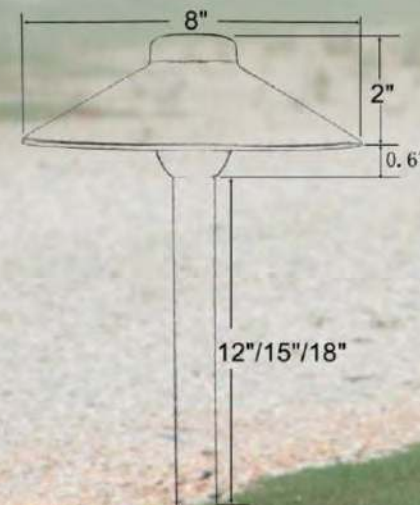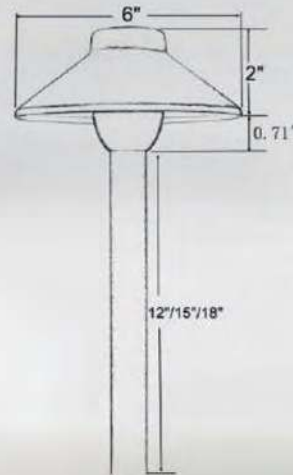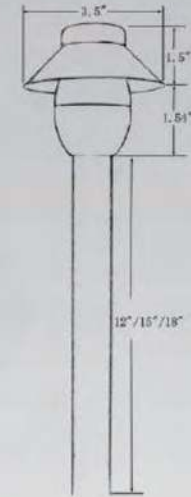

MATERIAL / FEATURES

- Heavy Duty Cast Brass
- Heat Resistant Convex Glass Lens
- Includes ABS Ground stake, 1/2" NPT thread, slotted for ease of installation
- EPDM Rubber Bug plug, Prevents moisture /bugs from entering fixture
- Thumb screw on kuckle for easy field adjustment
- Double "O" ring seal for added moisture protection

SPECIFICATION

Finish : Bronze
 Lamp : MR16 (Lamp not included)
 Wire Lead : 3' -#18/2 direct bury landscape lighting wire
 Stake : ABS Ground stake
 Lens : Heat Resistant Glass Lens

APPLICATIONS

- Grazing
- Up Lighting
- Down Lighting
- Moon Lighting
- Back Lighting



Riser connector




90 degree Elbow




T-TYPE connector



WBG-719

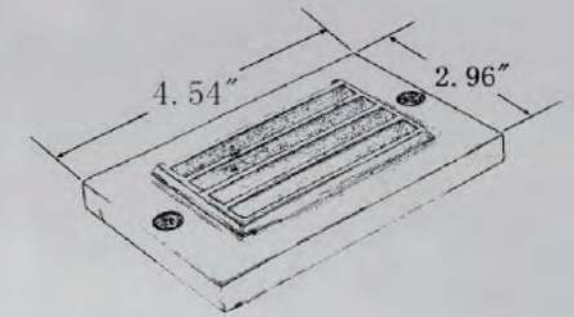

WBG3-719

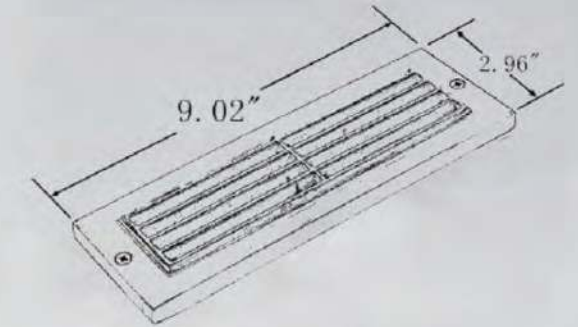

MATERIAL / FEATURES

- Die-Cast Brass
- Louvered with frosted glass lens or Grill covers

SPECIFICATION


Finish : Bronze
 Light Output : Full Reflector for Max light output
 Wire Lead : 6' -#18/2 direct bury landscape lighting wire

APPLICATIONS


- Stairs
- Steps
- Down Lighting
- Entry Columns




CHA-D3-0.5

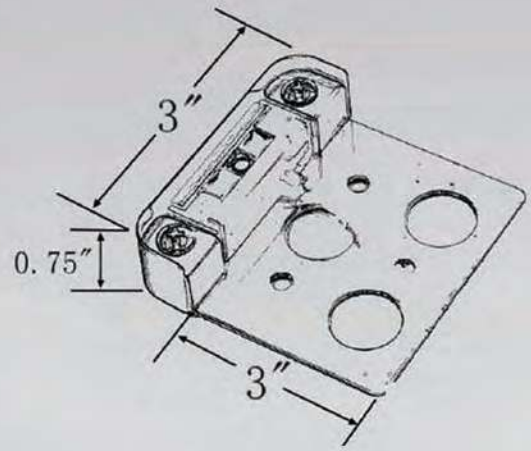

CHA-D7-1.5

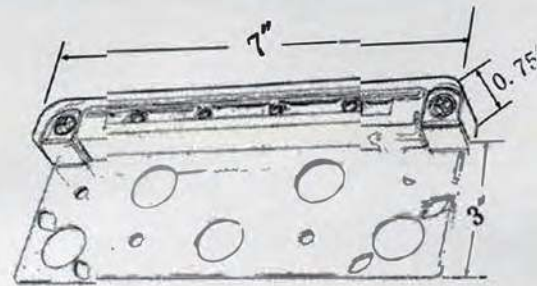

CHA-D13-2.5

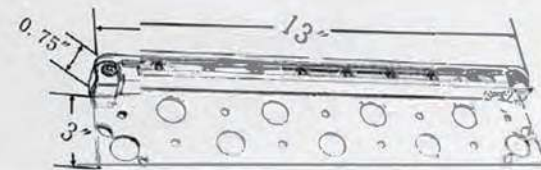

METERIAL / FEATURES

- Cast Aluminum light bar
- Stainless steel bracket & glare shield

SPECIFICATION


Finish : Bronze
 Wire Lead : 10' -18/2 Direct bury landscape lighting wire
 Kelvin Color : 2700K/3000K
 Rated Life: 30,000 Hours
 LED NO. : 1 LED(RHL-8500-ABZ); 4 LED(RHL-8501-ABZ); 8 LED(RHL-8502-ABZ)

APPLICATIONS


- Stairs
- Decks
- Retaining Walls



Goo-Fy5

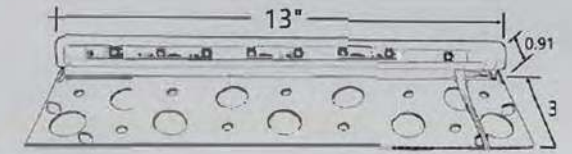

Goo-Fy13

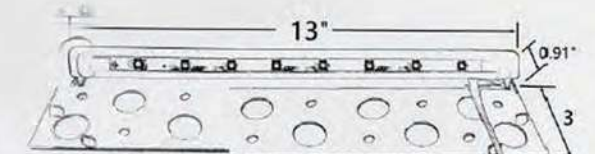

METERIAL / FEATURES

- Cast Aluminum light bar
- Stainless steel bracket & glare shield
- Removable light bar for wider variety of uses

SPECIFICATION


Finish : Bronze
 Wire Lead : 10' -18/2 Direct bury landscape lighting wire
 Kelvin Color : 2700K/3000K
 Rated Life: 30,000 Hours
 LED NO. : 4 LED(RHL-8501R-ABZ); 8 LED(RHL-8502R-ABZ)

APPLICATIONS

- Stairs
- Decks
- Retaining Walls



CLI-FF5

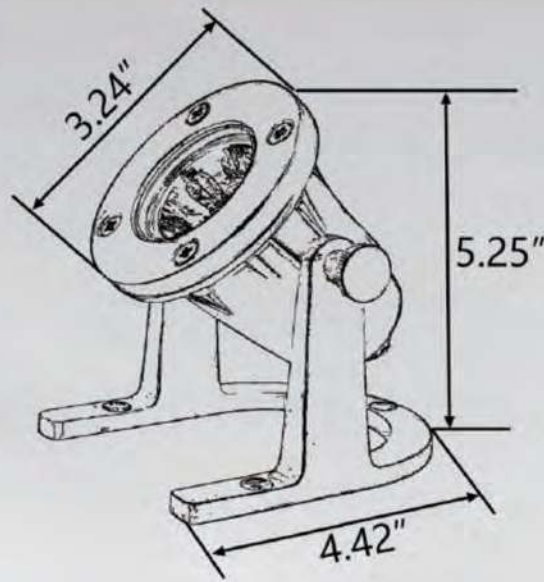

MATERIAL / FEATURES


- Cast Brass
- Heat resistant glass lens
- Easy lamp replacement

SPECIFICATION


Finish : Bronze
 Lamp : 35 watt max (MR16 lamp not included)
 Wire Lead : 25' - Submersible rated lighting wire
 Lens: Heat resistant glass lens
 Waterproof Level: IP 68

APPLICATIONS

Underwater lighting

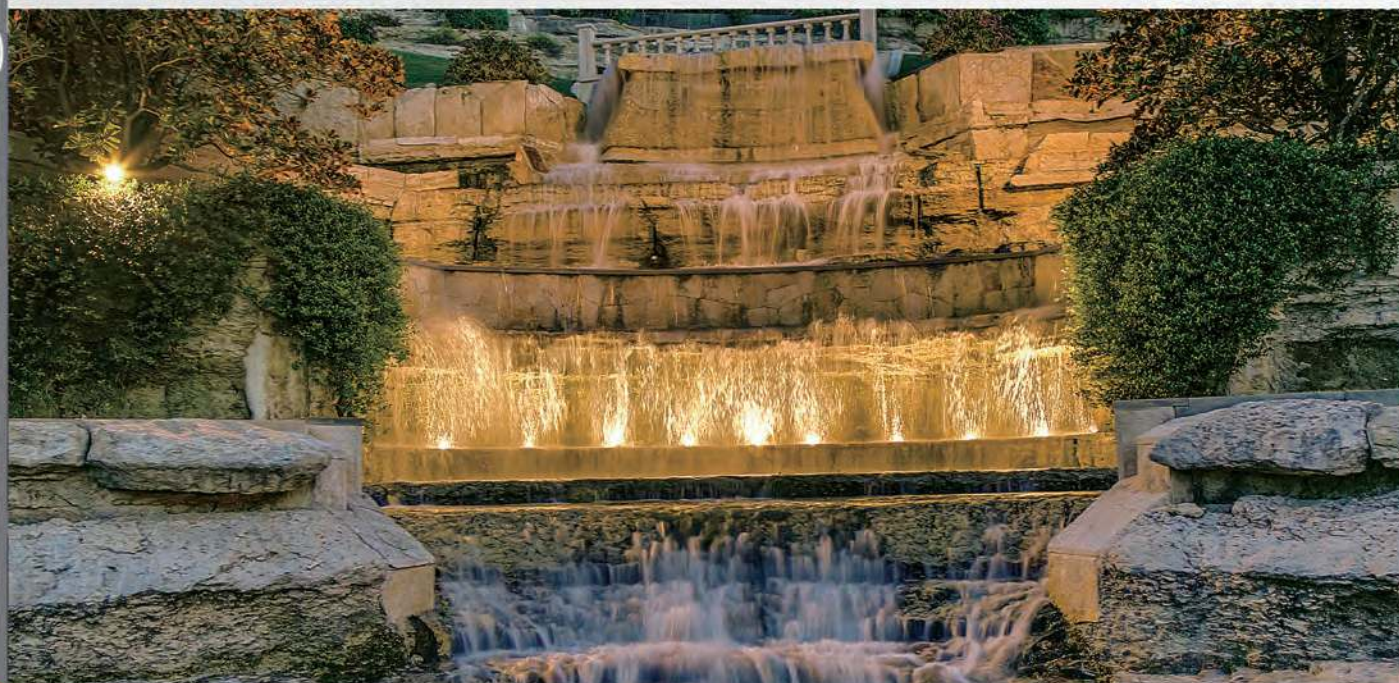

FEM-523

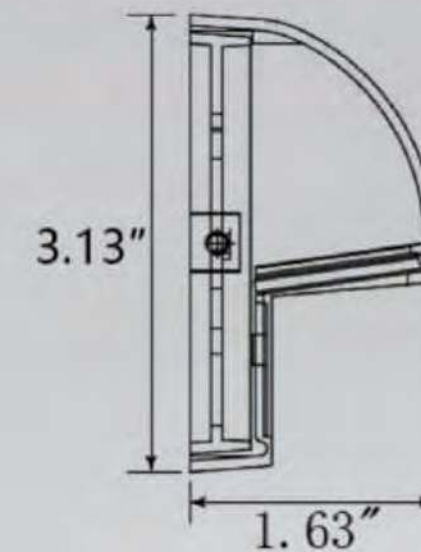


MATERIAL / FEATURES

- Cast Brass
- Hi-temp ceramic socket with nickel contacts, stainless steel springs, and Teflon jacketed wire leads


SPECIFICATION

Finish : Bronze
 Lamp : 20 watt max (G4 lamp not included)
 Wire Lead : 6' 18/2 Direct bury landscape lighting wire
 Lens: Heat resistant frosted glass lens



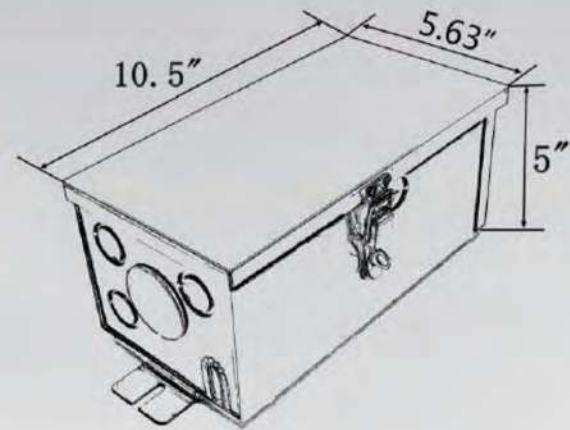

HSA-50W/150W

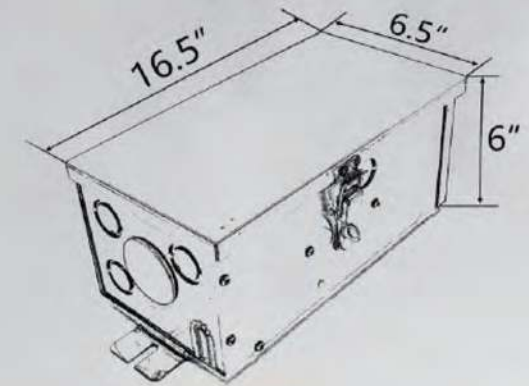

HSA-300W



MATERIAL

304 Stainless Steel Case

SPECIFICATION

Core: Fully Encapsulated TOROID Core
Finish: Muted Stainless Steel
Protection: Primary Side Thermal Protection,
Secondary Side Magnetic Circuit Breaker
Wire Lead: 6' -Heavy Duty Power Cord
Input Voltage: 120VAC
Taps: 12V, 13V, 14V, 15V


APPLICATIONS

LED Lighting Systems,

Water Feature Lighting



HSAW-PC150

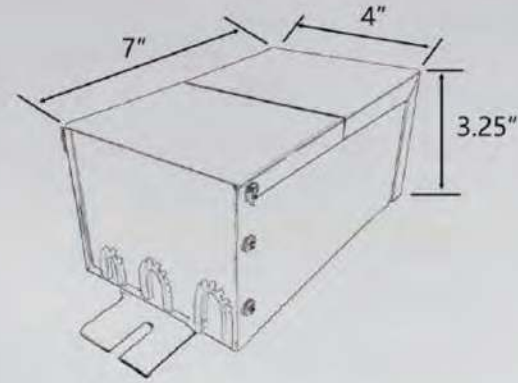

↙ **MATERIAL / FEATURES**

· 304 Stainless Steel Case

↙ **SPECIFICATION**

Core: Fully Encapsulated EI Core
 Finish: Muted Stainless Steel
 Protection: Primary Side Thermal Protection,
 Secondary Side Magnetic Circuit Breaker
 Wire Lead: 6' -Heavy Duty Power Cord
 Input Voltage: 120VAC
 Taps: 12V, 15V

↙ **APPLICATIONS**

LED Lighting Systems,

Water Feature Lighting



DT

7 Day Programmable Timer



MT

Up to 48 on/off Setting
 24 Hour Cycle
 Never Lose Pins
 Repeats Daily
 Manual Override



PC

Plug-In Photocell



PC-R Remote Plug-In Photocell

Remote Plug-In Photocell

MR 16



SPECIFICATION

Model : MR16

Power: 3W/5W/7W
 Voltage : AC/DC 12V(8-18VAC)
 Base : GU5.3 Bin-Pin
 CCT : 2700K/3000K
 Material : Aluminum
 Housing color : White
 Led Chip : Luminus
 Lumen : 290Lm -3W
 390Lm -5W
 490Lm -7W
 Rated Life : 40000 hours
 Warranty : 3 Years
 CRIs : 80+
 Angle : Narrow Spot 15°, Flood 40°, Wide Flood 60°
 Environment : Epoxy pttng making lamp suitablefor outdoor wet envieonments in open or enclosed fixtures.

PAR 36



SPECIFICATION

Model : PAR 36

Surface Treatment:Spray Paint
 Material : Aluminum
 Shell Color : black
 Lens : PC
 Connector Type : G53
 Water proof : IP67

| LED Type | Nominal Ans/oct | Input Voltage | Power Total | Lumens (LM) | CRI MIN | View Angle | Operating Life |
|----------|-----------------|---------------|-------------|-------------|---------|------------|----------------|
| 2835 | 2700-6500K | AC/DC 12V | 4W | 370 | >80 | 38° 60° | 35000H |
| 2835 | | | 6W | 450 | | | |
| 3030 | | | 10W | | | | |

Key Applications:

- Shop Lighting
- Office Lighting
- Commercial Lighting
- Plant Lighting
- Stairway Lighting
- Corridor Lighting
- Cabinet / Shelf Lighting
- Directly in place of 35W Halogen Light
- Home Lighting

Features:

- High CRI
- Long Lifetime
- High Brightness
- Energy Saving
- Heat Dissipation
- UV / IR Free
- G53 Base
- Excellent heat Design
- Wide angle range

Model : G4 1.5W



| | | | |
|----------|--------------|-----------|--------------|
| Power: | 1.5W | Cap: | G4 |
| Lumen: | 80LM | Size: | 10*35 mm |
| Voltage: | AC/DC 12V | N.W. | 3g |
| CT: | 2700K/3000K | PF: | 0.6 |
| RA: | 80 | Material: | PCB+silicone |
| LED NUM: | 24PCS | | |
| Chip: | Epistar 3014 | | |

Model : G4 2.5W



| | | | |
|----------|--------------|-----------|--------------|
| Power: | 2.5W | Cap: | G4 |
| Lumen: | 150LM | Size: | 10*35 mm |
| Voltage: | AC/DC 12V | N.W. | 5g |
| CT: | 2700K/3000K | PF: | 0.5 |
| RA: | 80 | Material: | PCB+silicone |
| LED NUM: | 48 | | |
| Chip: | Epistar 3014 | | |

Model : G4 3.5W



| | | | |
|----------|--------------|-----------|--------------|
| Power: | 3.5W | Cap: | G4 |
| Lumen: | 250LM | Size: | 16*41 mm |
| Voltage: | AC/DC 12V | N.W. | 7g |
| CT: | 2700K/3000K | PF: | 0.4 |
| RA: | 80 | Material: | PCB+silicone |
| LED NUM: | 64 | | |
| Chip: | Epistar 3014 | | |




WOO-D-BRASS



WOO-D-BRZ



WOO-D-BLK

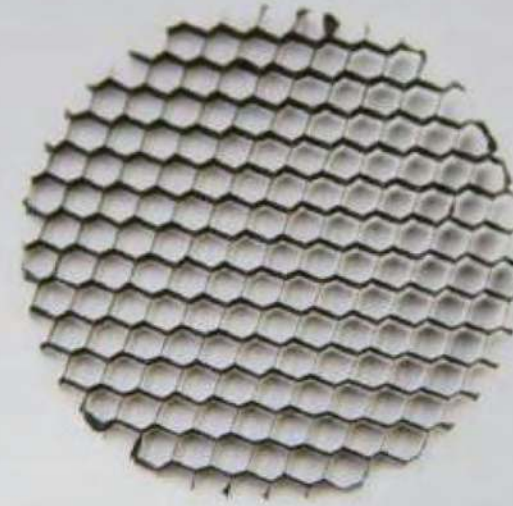

MR16 Honeycomb Lense



PAR36 Honeycomb Lense



Riser connector



90 degree elbow



T type connector



12 " 15 " 18 " Pole



Small Ground Stake



Large Ground Stake

